



## LDV-U150S 系列概述

### 一. 电源规格:

电源型号 (MODEL)	输入 (VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
LDV-U150S12	100~240VAC	12V/12.5A	SCP/OCP/OVP/OTP	222mm*60mm*41mm
LDV-U150S24	100~240VAC	24V/6.25A	SCP/OCP/OVP/OTP	222mm*60mm*41mm
LDV-U150S36	100~240VAC	36V/4.2A	SCP/OCP/OVP/OTP	222mm*60mm*41mm
LDV-U150S48	100~240VAC	48V/3.2A	SCP/OCP/OVP/OTP	222mm*60mm*41mm

### 二. 系列特性:

#### Features:



- Universal AC input / Full range
- Open frame unit
- Protections: SCP /OCP/ OVP /OTP
- Low cost, high reliability, high efficiency
- 100% full load burn-in test
- 1 years warranty

### 三. 产品外观:



net weight: 1Kg

## 四. 工作温度, 输出功率曲线以及负载曲线图:

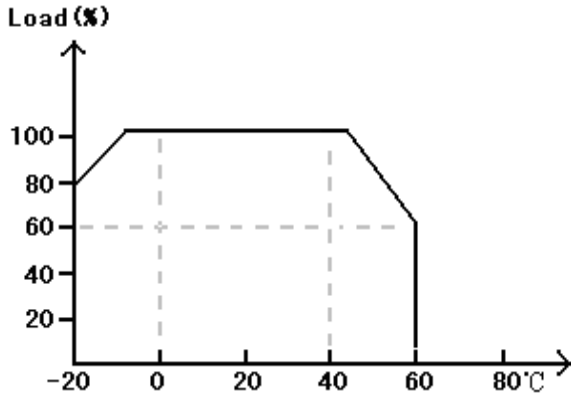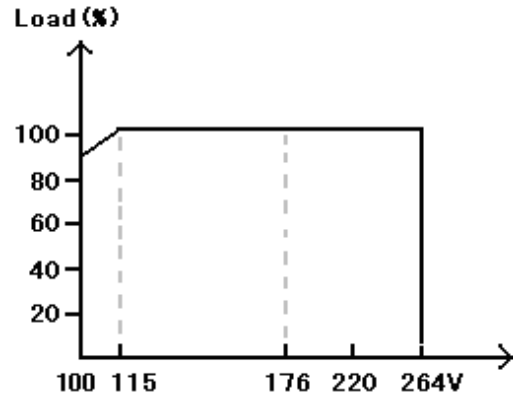**Temperature- load curve**

**Input voltage- load curve**


## 五. 测试标准:

**EMC DATA:**
**1、 EMI**

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2

**2、 EMS**


ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz~80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A



### 六. 安装尺寸:

### build in dimension

unit: mm

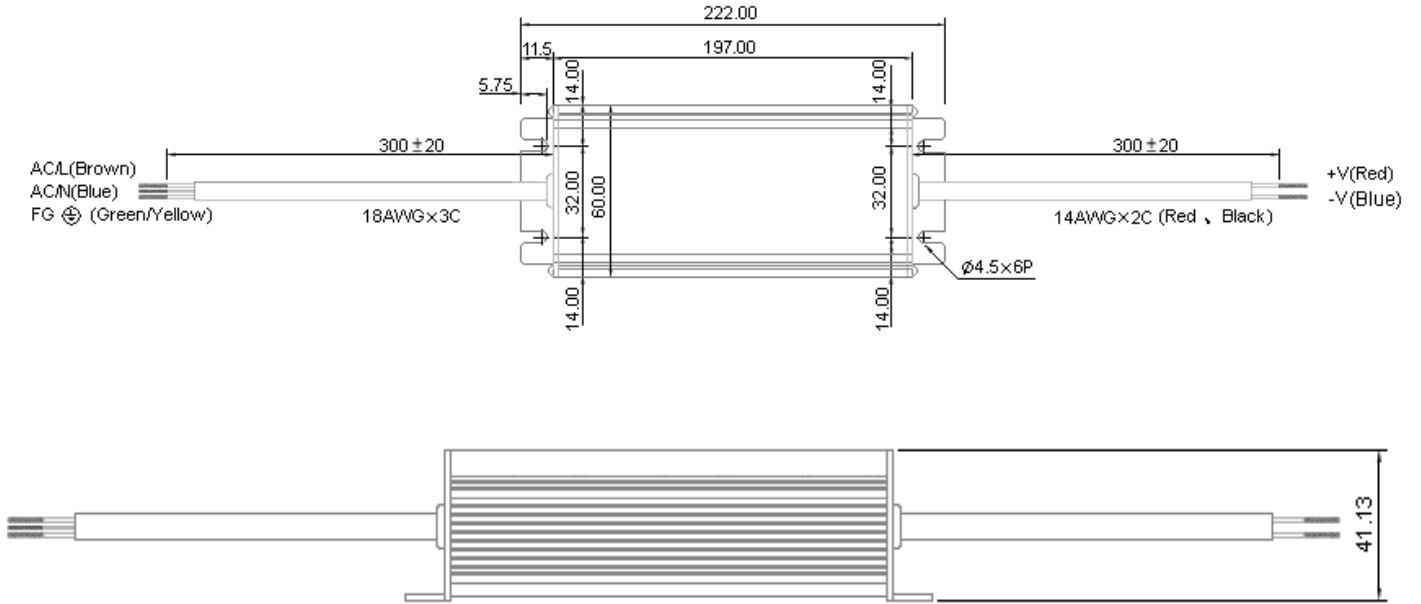




七. 标签:


MODEL: LDV-U150S12

Spec Label


<ul style="list-style-type: none"> <li>● ACL (Brown)</li> <li>● ACN (Blue)</li> <li>● FG (Yellow /green)</li> </ul>		<b>MODEL:LDV-U150S12</b> CLASS 2 POWER SUPPLY	+Vo ● (Red)
		AC INPUT: 100-240VAC I max 2.0A 50/60Hz DC OUTPUT: +12V ---12.5A	
		<b>LED DRIVER IP67</b>	-Vo ● (Blue)
		Tel: 020-85559690 Address: Guangzhou YAPU(YAONEN) Electronics Co., Ltd	<b>MADE IN CHINA</b>

八. 包装:

Packing unit: mm

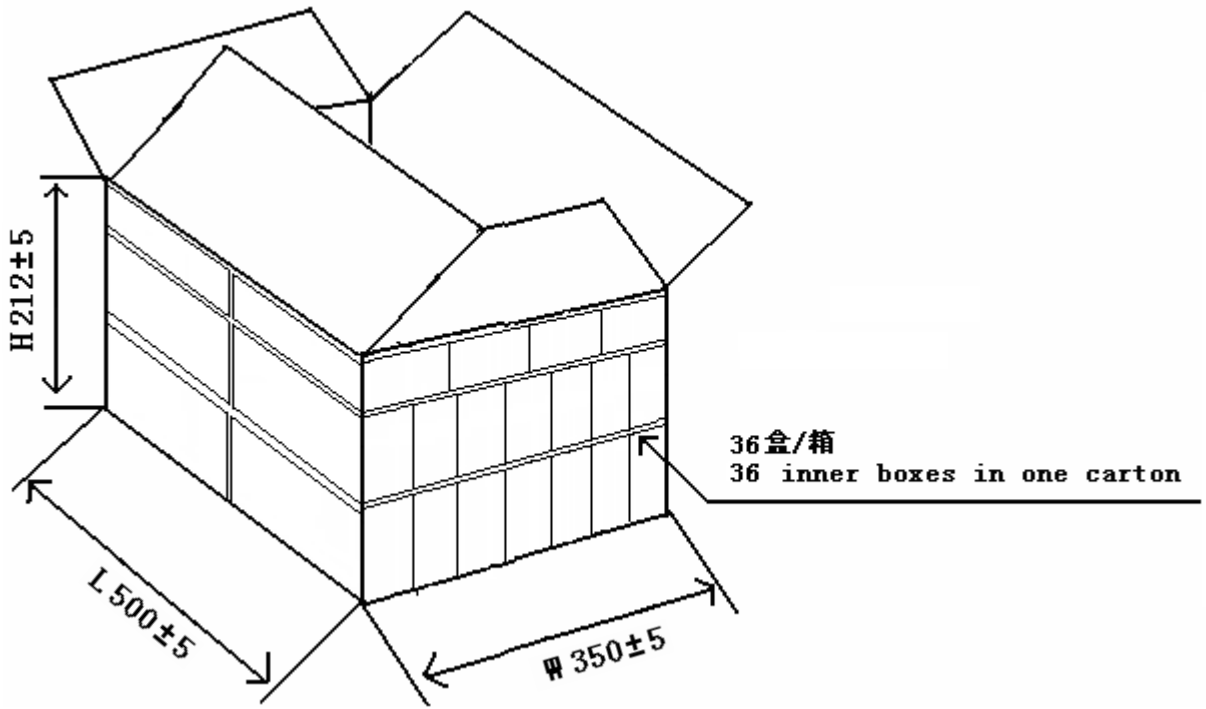

Inner Box plane

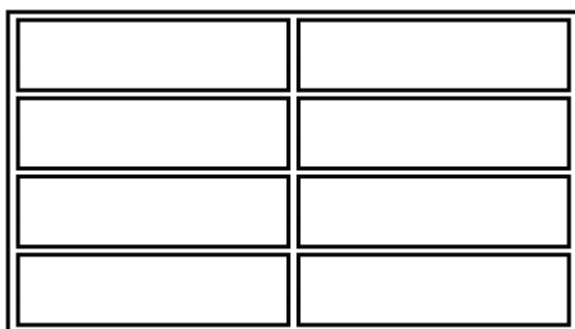

solid

