



## EPM-S250D 系列概述

### 一. 电源规格:

电源型号 (MODEL)	输入(VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
EPM-S250D12+24	90-132VAC' 176-264VAC	12V/12A; 24V/3A	SCP/OCP/OVP/OTP	150mm*140mm*85mm
EPM-S250D12+28	90-132VAC' 176-264VAC	12V/12A; 28V/3A	SCP/OCP/OVP/OTP	150mm*140mm*85mm
EPM-S250D12+32	90-132VAC' 176-264VAC	12V/12A; 32V/3A	SCP/OCP/OVP/OTP	150mm*140mm*85mm
EPM-S250D24+12	90-132VAC' 176-264VAC	24V/10A; 12V/1A	SCP/OCP/OVP/OTP	150mm*140mm*85mm

### 二. 系列特性:

#### Features:

- AC input range selectable by switch
- Compact size
- Protections: SCP /OCP/ OVP/OTP
- Forced air cooling by built-in DC fan
- High efficiency, high reliability
- 100% full load burn-in test
- 1 years warranty


### 三. 产品外观:



net weight: 1230g



## 四. 工作温度，输出功率曲线：

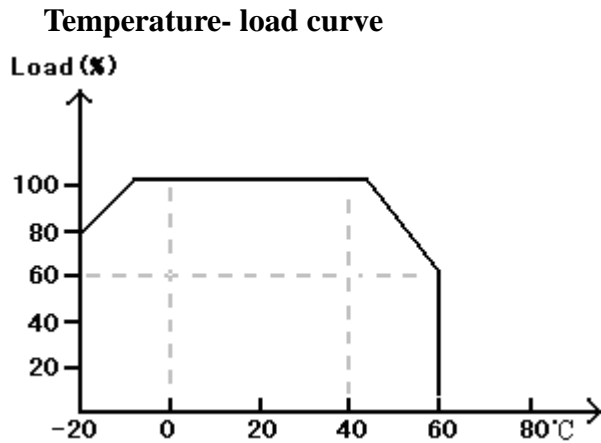

## 五. 测试标准：

## EMC DATA:

## 1、 EMI

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2





## 2、 EMS

ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A

六. 安装尺寸:

build in dimension


unit: mm

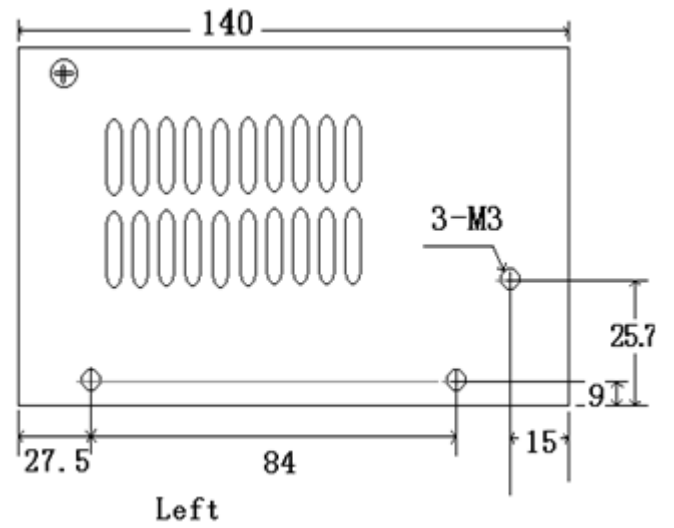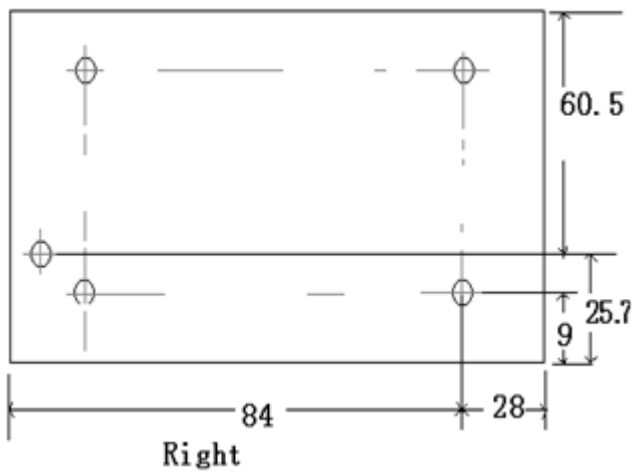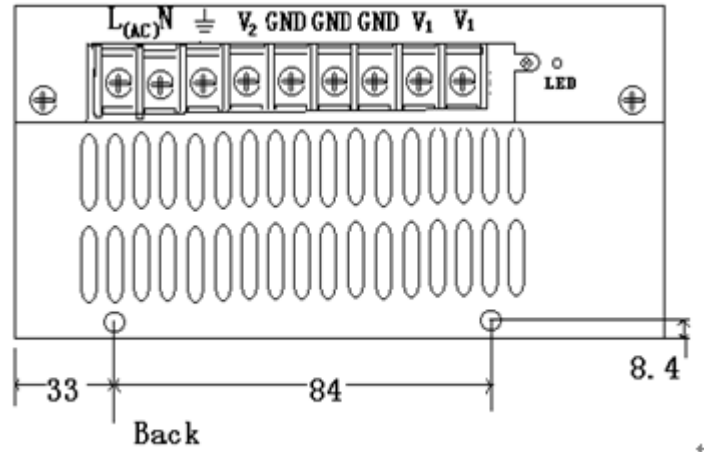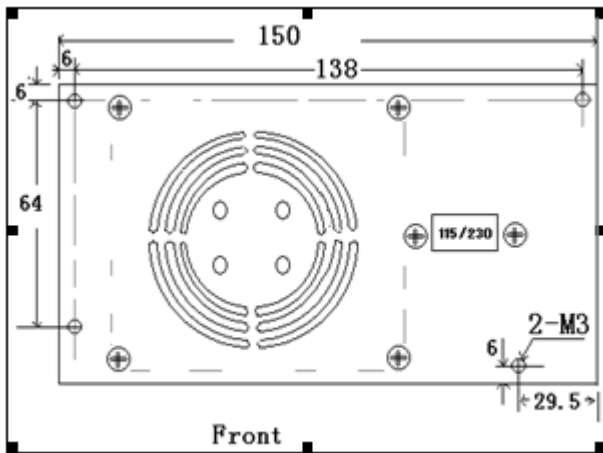




七. 标签:


Spec Label

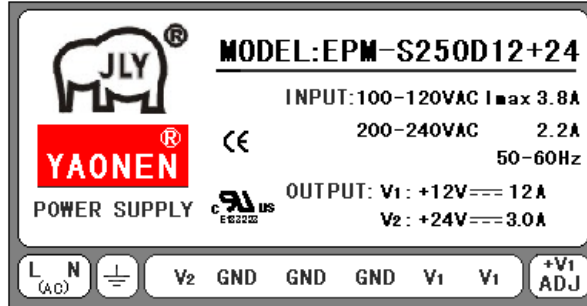

八. 包装:

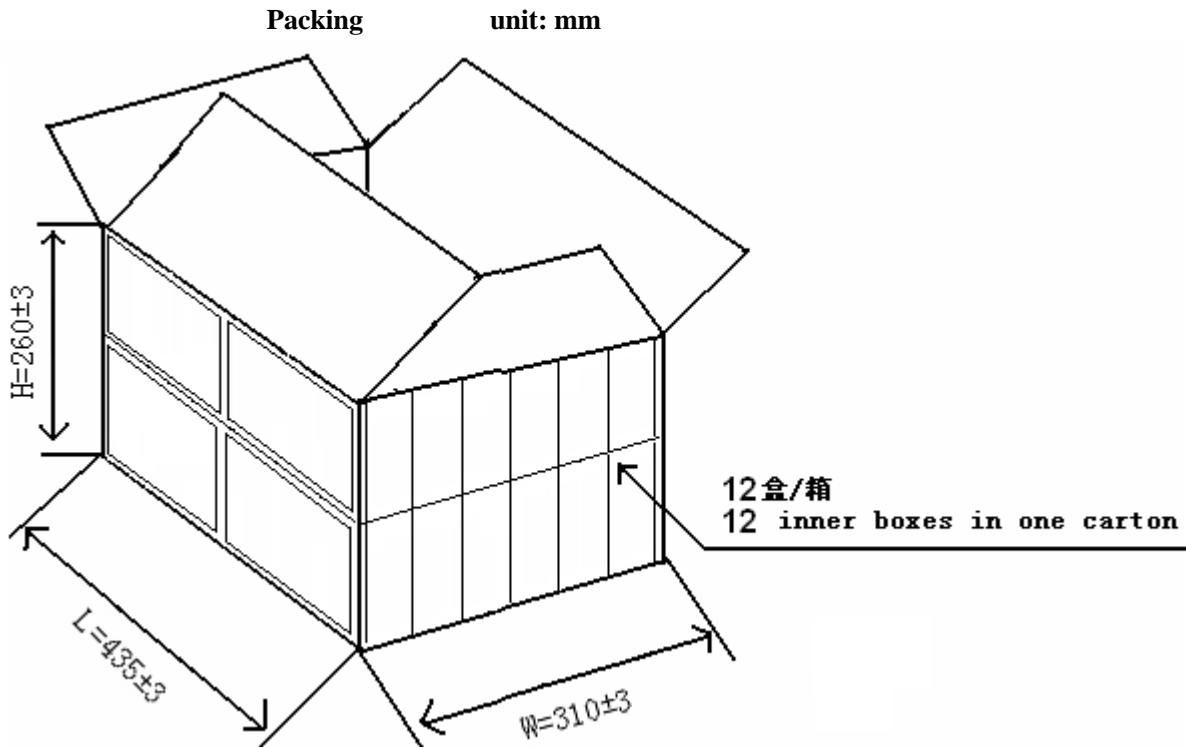

Inner Box plane

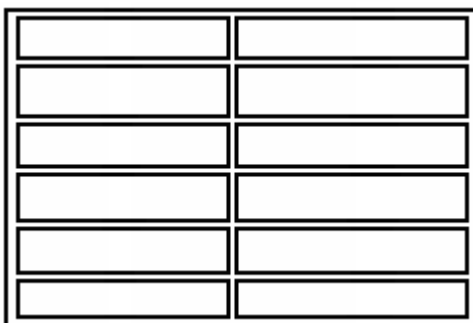

solid

