



## ESM-U60S 系列概述

### 一. 电源规格:

电源型号 (MODEL)	输入(VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
ESM-U60S5	100~240VAC	5V/10A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S8.5	100~240VAC	8.5V/7A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S12	100~240VAC	12V/5A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S15	100~240VAC	15V/4A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S18	100~240VAC	18V/3.5A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S24	100~240VAC	24V/2.5A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S28	100~240VAC	28V/2.2A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S30	100~240VAC	30V/2A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S36	100~240VAC	36V/1.7A	SCP /OCP/OVP	129mm*98mm*38mm
ESM-U60S48	100~240VAC	48V/1.3A	SCP /OCP/OVP	129mm*98mm*38mm

### 二. 系列特征:

#### Features

- Universal AC input / Full range
- Compact size
- Protections: SCP /OCP/ OVP
- High efficiency
- Low cost, high reliability
- 100% full load burn-in test
- 1 years warranty


三. 产品外观:




Net weight: 385g/pcs

四. 工作温度, 输出功率曲线以及负载曲线图:

Temperature- load curve

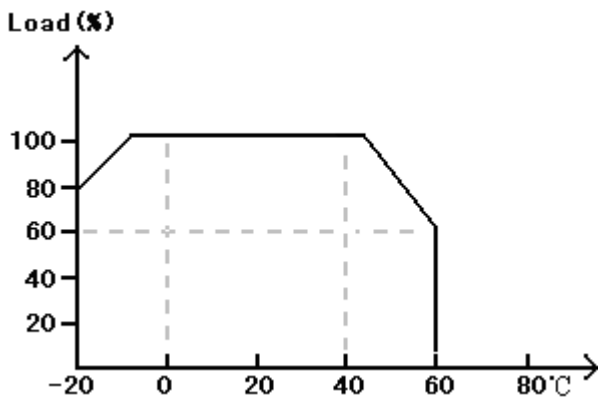

Input voltage- load curve

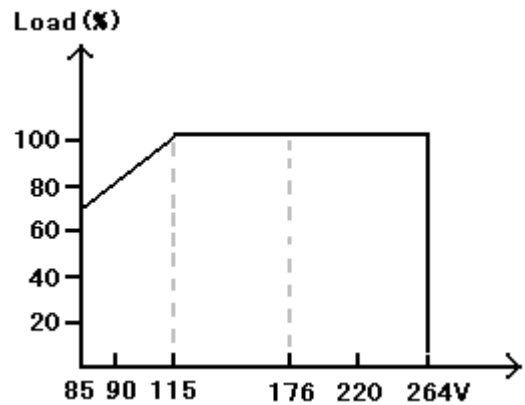

五. 测试标准:

EMC DATA:


1、 EMI

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2

2、 EMS


ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A



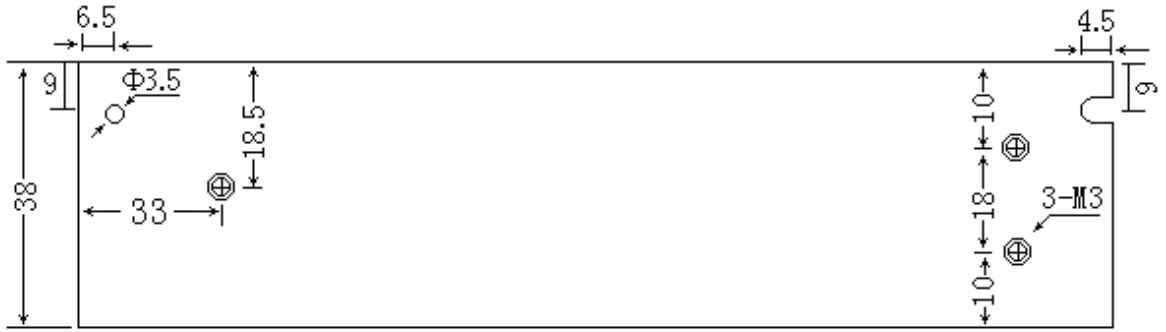


七. 标签:


Spec Label

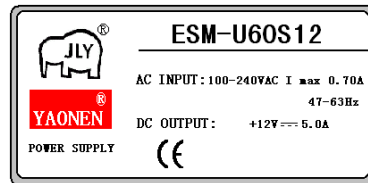


Connector define



八.包装:

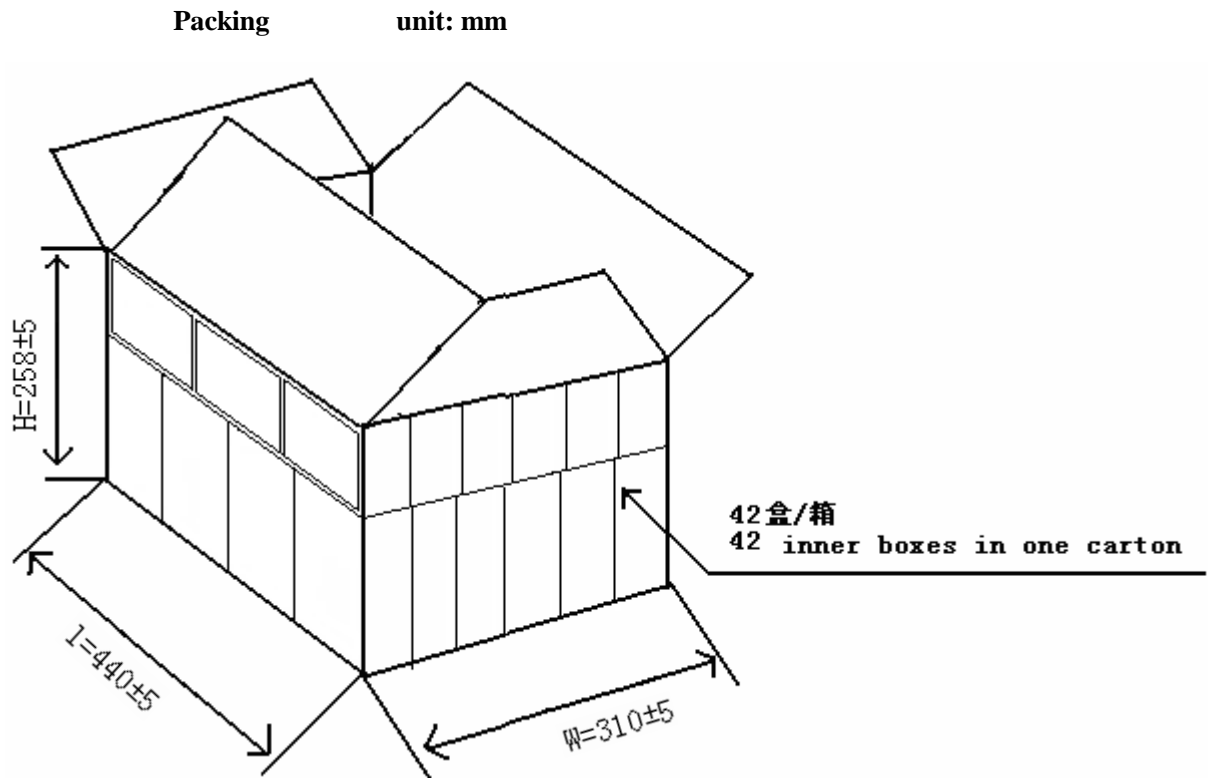

Inner Box plane

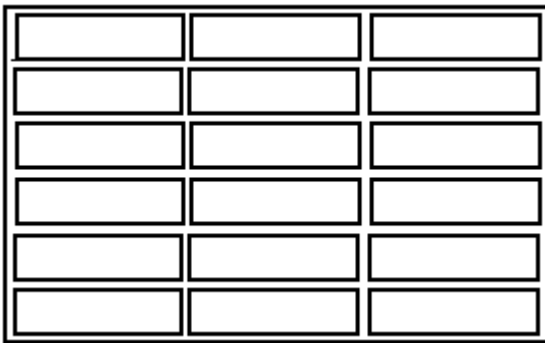

solid

