

**一. 电源规格:**

电源型号 (MODEL)	输入(VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
EPM-S100T12+5-12	90-132VAC' 176-264VAC	12V/8A; 5V/3A; -12V/1A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100T28+12-28	90-132VAC' 176-264VAC	28V/3A; 12V/0.5A; -28V/3A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100T5+12-12	90-132VAC' 176-264VAC	5V/10A; 12V/4A; -12V/1.5A	SCP/OCP/OVP	198mm*98mm*39mm
EPM-S100T5+24-24	90-132VAC' 176-264VAC	5V/5A; 24V/2.5A; -24V/1.5A	SCP/OCP/OVP	198mm*98mm*39mm

**二. 系列特性:**
**Features:**

AC input range selectable by switch

Compact size

Protections: SCP /OCP/ OVP

High efficiency, high reliability


100% full load burn-in test

1 years warranty

**三. 产品外观:**


net weight: 0.65Kg

## 四. 工作温度, 输出功率曲线:

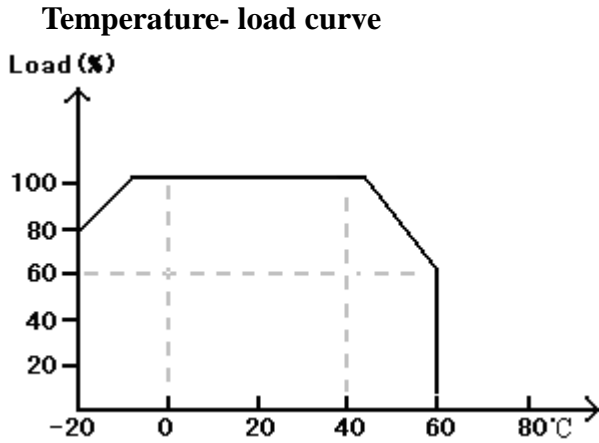

## 五. 测试标准:

## EMC DATA:

### 1、 EMI

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2


### 2、 EMS

ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:-/+2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900-/+5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A

## 六. 安装尺寸:


build in dimension

unit: mm

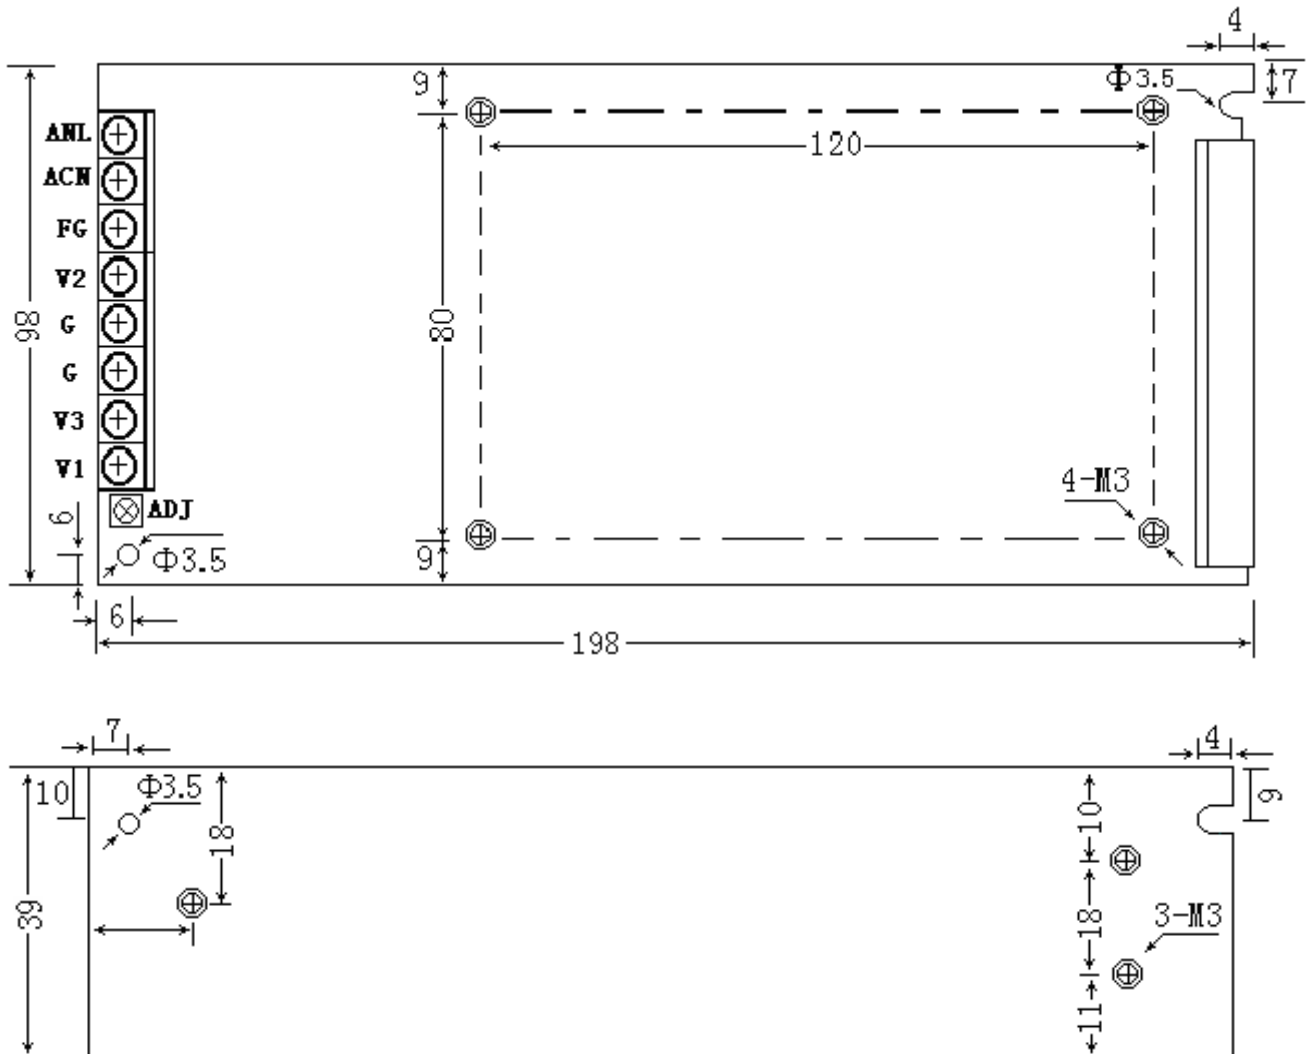

七. 标签:

Spec Label

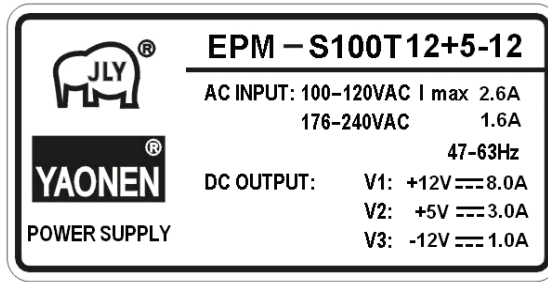


Connector define




八. 包装:

Packing unit: mm

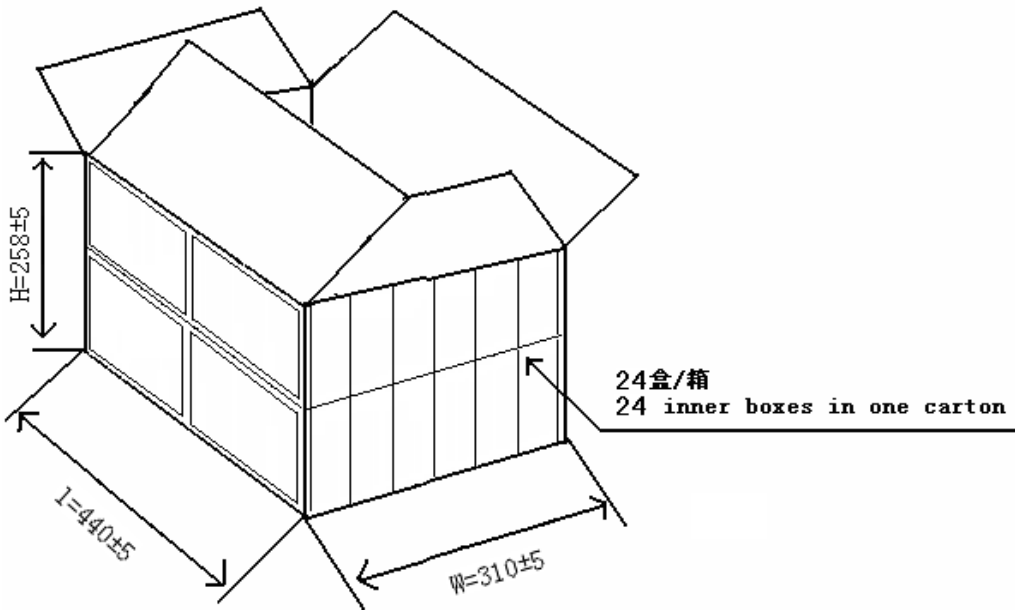

Inner Box plane

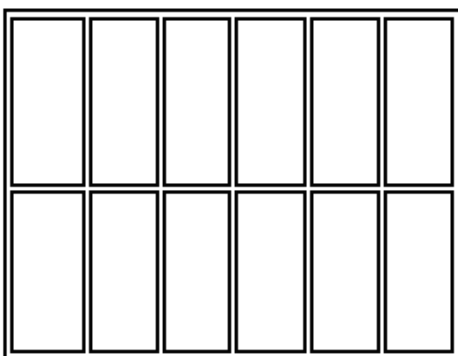

solid

