



PFM-U300D 系列概述

一. 电源规格:

电源型号 (MODEL)	输入 (VAC)	输出 (VDC)	保护功能 (PROTECTION)	尺寸 (SIZE) MM
PFM-U300D12+5R	100~240VAC	12V/24A; 5V/3A	SCP/OCP/OVP/OTP	227mm*115mm*50mm
PFM-U300D12+24	100~240VAC	12V/12A; 24V/6.5A	SCP/OCP/OVP/OTP	227mm*115mm*50mm
PFM-U300D24+5R	100~240VAC	24V/12A; 5V/3A	SCP/OCP/OVP/OTP	227mm*115mm*50mm
PFM-U300D40+24	100~240VAC	40V/6A; 24V/4.5A	SCP/OCP/OVP/OTP	227mm*115mm*50mm
PFM-U300D48+28	100~240VAC	48V/6A; 28V/1A	SCP/OCP/OVP/OTP	227mm*115mm*50mm
PFM-U300D28+120	100~240VAC	28V/2.0A; 120V/2.5A	SCP/OCP/OVP/OTP	227mm*115mm*50mm

二. 系列特征:

Features:

- Universal AC input / Full range
- Compact size
- Protections: SCP / OCP / OVP / OTP
- Built in active PFC
- Forced air cooling by built-in DC fan
- All using 105℃ long life electrolytic capacitors
- High efficiency, High reliability, High working temperature
- 100% full load burn-in test
- 3 years warranty


三. 产品外观:




net weight: 1150g

四. 工作温度，输出功率曲线以及负载曲线图：

Temperature- load curve

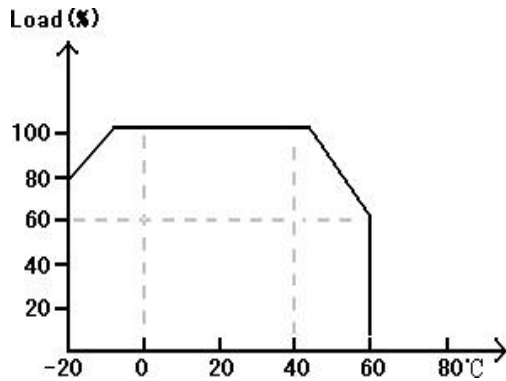

Input voltage- load curve

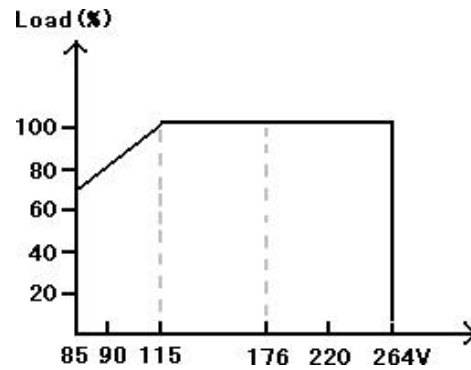

五. 测试标准：

EMC DATA:

1、 EMI

RE/CE	EN55022 CLASS A
Harmonics Current	EN61000-3-2


2、 EMS

ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A

六. 安装尺寸:

build in dimension


unit: mm

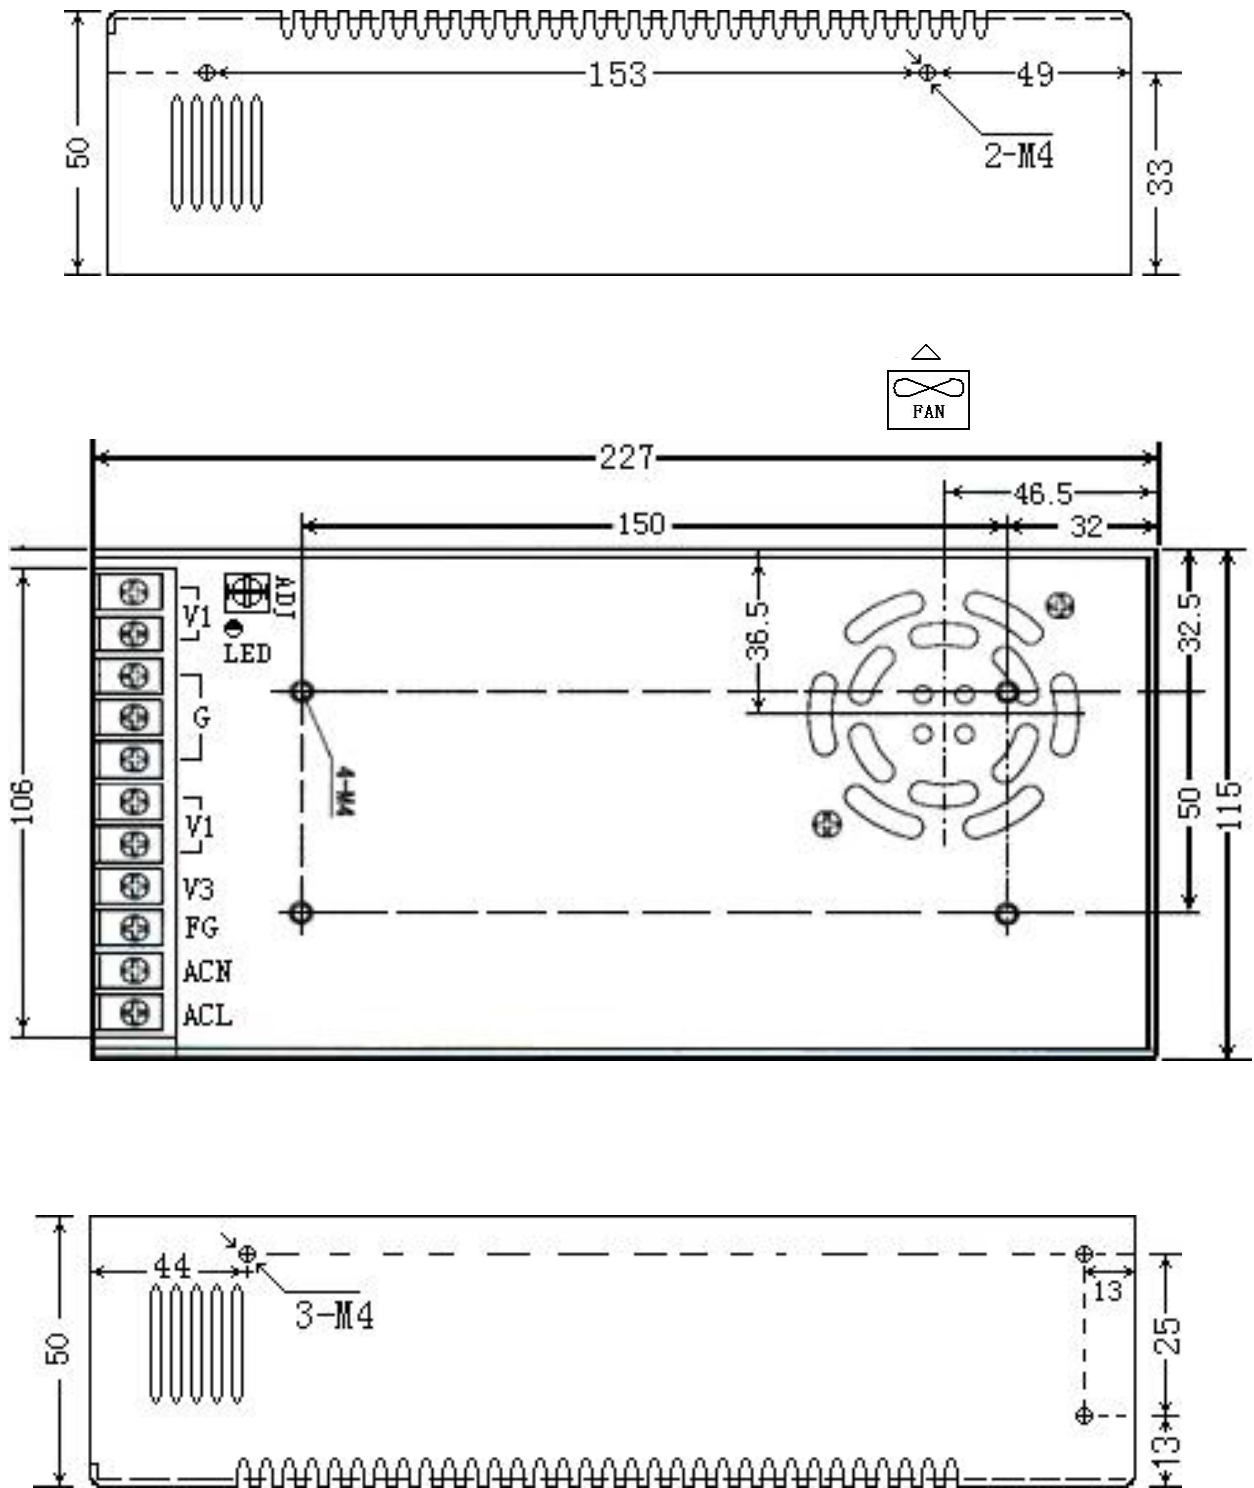




七. 标签:

Spec Label

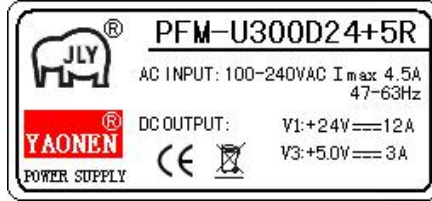

Connector define

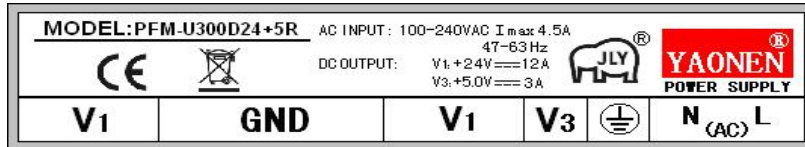


ADJ:OUTPUT ADJ



八. 包装:

Packing

unit: mm

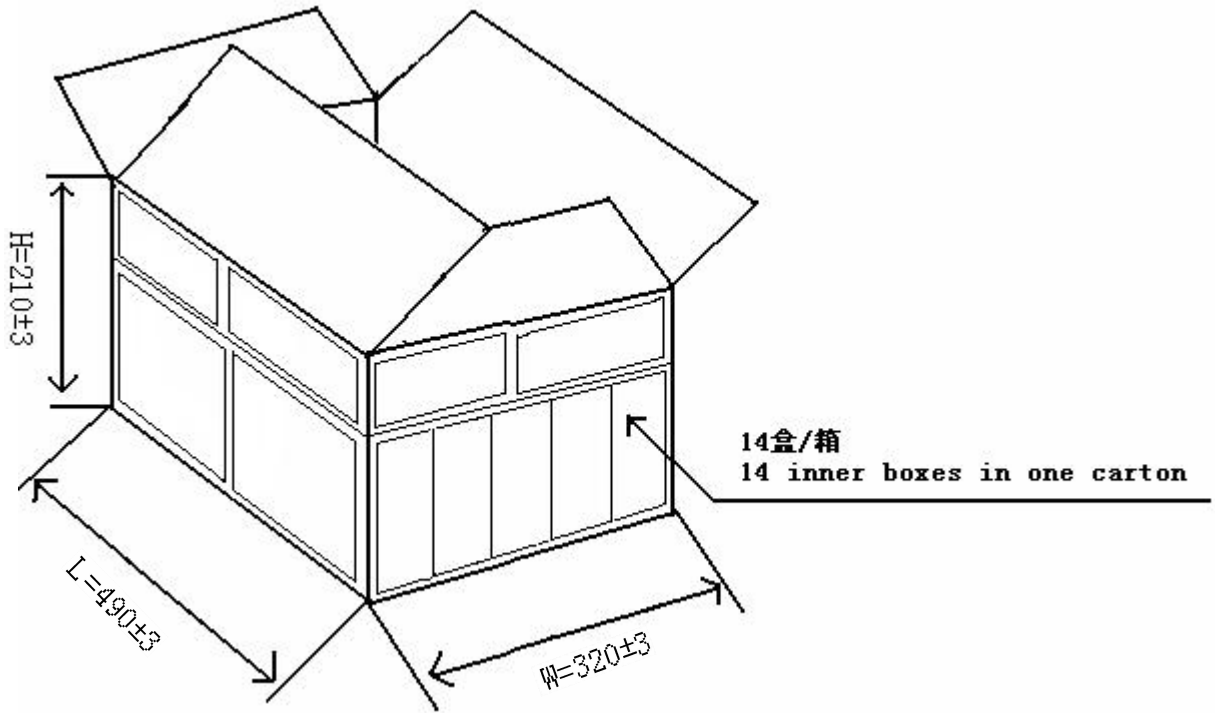

Inner Box plane

solid

